




CAPRA 29 CORE 4 CF

FRAME	Ultra Modulus Carbon Frame	V4L 165 mm 148 x 12 mm YT Thru Axle UDH
EXT STORAGE	CRANKBROTHERS	S.O.S TS2 Tube Stash OE
FORK	FOX 38 Factory Shiny Orange	29" 170 mm Grip X2 110 x 15 mm 44 mm Offset
SHOCK	FOX DHX2 Factory	230 x 65 mm H/LSC H/LSR Custom Tune
SPRING	FOX SLS Coil Shiny Orange	300 lbs (S) 350 (M) 400 (L) 450 (XL) 500 (XXL)
HEADSET	CANE CREEK Series 40	ZS44 ZS56 High Cap 2 Spacer 5 mm
STEM	RENTHAL Apex 35	50 mm +/-6° Custom Black
HANDLEBAR	RENTHAL Fatbar 35	800 mm 7° Back 5° Up Custom Black
		30 mm Rise (S - M) 40 mm Rise (L - XXL)
GRIPS	ODI ELITE MOTION V2.1	Lock-On
CRANKSET	SRAM XO Eagle Transmission	170 mm 32T T-Type DUB
CHAINGUIDE	E13 Vario Enduro	I05 28-32 T Compact Slider Bashguard
CASSETTE	SRAM GX Eagle Transmission	10-52T XS-1275 Black T-Type 12-Speed
DERAILLEUR	SRAM GX Eagle Transmission	12-Speed T-Type
SHIFTER REAR	SRAM POD Ultimate Controller	12-Speed 2 Button Concave Discrete Clamp
WHEELSET	CRANKBROTHERS Synthesis	29" 31,5 mm 110 x 15 mm 6-Bolt I9 1/1
	Enduro 3 Alloy I9 1/1	29" 29,5 mm 148 x 12 mm 6-Bolt I9 1/1 XD
TIRE FRONT	CONTINENTAL Kryptotal-Fr	29" x 2.4 WT Super Soft Enduro
TIRE REAR	CONTINENTAL Kryptotal-Re	29" x 2.4 WT Soft Enduro
BRAKES	SRAM MAVEN Silver	HS Rotor 220 / 200 mm metal sintered brake pads
SEATPOST	YT POSTMAN V2	Ø 31.6 mm Adjustable drop 20 / 10 / 5 mm
	YT POSTMAN MMX-Remote	125 mm (S) 150 mm (M) 170 mm (L-XL) 200 mm (XXL)
SADDLE	SDG BEL Air 3.0	140 mm Lux-Alloy Rail YT Custom Design
BOTTOM BRACKET	SRAM DUB Pressfit	BB DUB PF MTB 92 WIDE

COLOR: DEEP GREEN, BLACK MAGIC BOLT

SIZES: S,M,L,XL,XXL

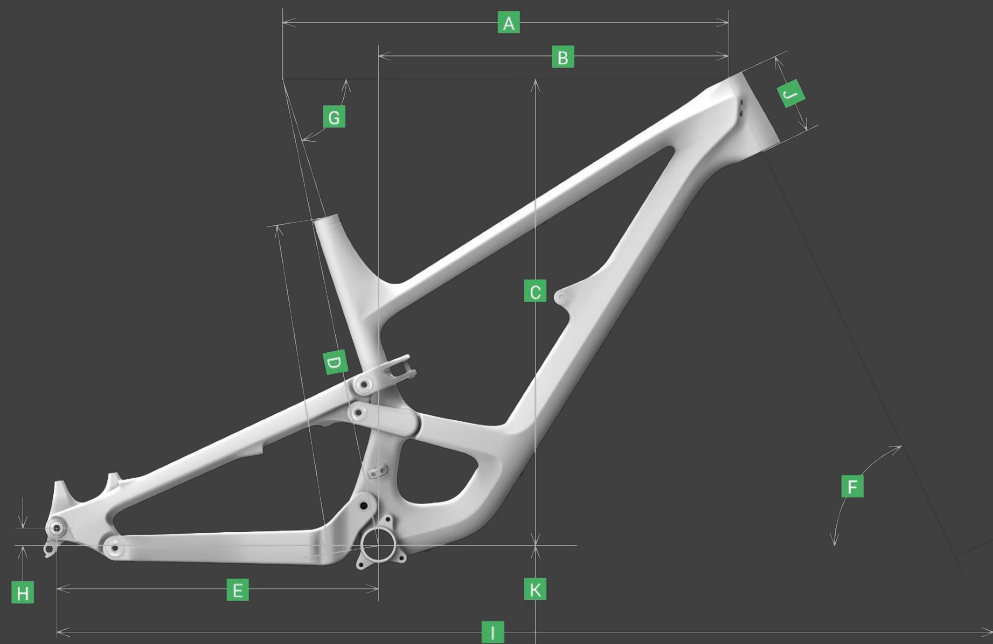

CAPRA 29 CORE 4 CF

Flipchip position		High					Low				
Frame size		S	M	L	XL	XXL	S	M	L	XL	XXL
A	Toptube in mm	562	585	605	628	651	563	586	606	629	652
B	Reach in mm	430	450	470	490	510	427	447	467	487	507
C	Stack in mm	623	632	632	641	650	625	634	634	643	652
D	Seattube in mm	395	420	445	470	495	395	420	445	470	495
E	Chainstay in mm	437	437	437	442	442	438	438	438	443	443
F	Headtube angle	64.5 °	64.5 °	64.5 °	64.5 °	64.5 °	64.2 °	64.2 °	64.2 °	64.2 °	64.2 °
G	Seattube angle (eff)	78.0 °	77.9 °	77.9 °	77.9 °	77.8 °	77.7 °	77.6 °	77.6 °	77.6 °	77.5 °
H	BB drop	22	22	22	22	22	27	27	27	27	27
I	Wheelbase in mm	1203	1227	1247	1276	1301	1204	1228	1248	1277	1302
J	Headtube in mm	100	110	110	120	130	100	110	110	120	130
K	BB height in mm	354	354	354	354	354	349	349	349	349	349
L	Standover height in mm	749	741	739	750	747	745	737	735	746	743




CAPRA MX CORE 4 CF

FRAME	Ultra Modulus Carbon Frame	V4L 170 mm 148 x 12 mm YT Thru Axle UDH
EXT STORAGE	CRANKBROTHERS	S.O.S TS2 Tube Stash OE
FORK	FOX 38 Factory Shiny Orange	29" 170 mm Grip X2 110 x 15 mm 44 mm Offset
SHOCK	FOX DHX2 Factory	230 x 65 mm H/LSC H/LSR Custom Tune
SPRING	FOX SLS Coil Shiny Orange	325 lbs (S) 375 (M) 425 (L) 475 (XL) 500 (XXL)
HEADSET	CANE CREEK Series 40	ZS44 ZS56 High Cap 2 Spacer 5 mm
STEM	RENTHAL Apex 35	50 mm +/-6° Custom Black
HANDLEBAR	RENTHAL Fatbar 35	800 mm 7° Back 5° Up Custom Black
		30 mm Rise (S - M) 40 mm Rise (L - XXL)
GRIPS	ODI ELITE MOTION V2.1	Lock-On
CRANKSET	SRAM XO Eagle Transmission	170 mm 32T T-Type DUB
CHAINGUIDE	E13 Vario Enduro	I05 28-32 T Compact Slider Bashguard
CASSETTE	SRAM GX Eagle Transmission	10-52T XS-1275 Black T-Type 12-Speed
DERAILLEUR	SRAM GX Eagle Transmission	12-Speed T-Type
SHIFTER REAR	SRAM POD Ultimate Controller	12-Speed 2 Button Concave Discrete Clamp
WHEELSET	CRANKBROTHERS Synthesis	29" 31,5 mm 110 x 15 mm 6-Bolt I9 1/1
	Enduro 3 Alloy I9 1/1	27,5" 29,5 mm 148 x 12 mm 6-Bolt I9 1/1 XD
TIRE FRONT	CONTINENTAL Kryptotal-Fr	29" x 2.4 WT Super Soft Enduro
TIRE REAR	CONTINENTAL Kryptotal-Re	27,5" x 2.4 WT Soft Enduro
BRAKES	SRAM MAVEN Silver	HS Rotor 220 / 200 mm metal sintered brake pads
SEATPOST	YT POSTMAN V2	Ø 31.6 mm Adjustable drop 20 / 10 / 5 mm
	YT POSTMAN MMX-Remote	125 mm (S) 150 mm (M) 170 mm (L-XL) 200 mm (XXL)
SADDLE	SDG BEL Air 3.0	140 mm Lux-Alloy Rail YT Custom Design
BOTTOM BRACKET	SRAM DUB Pressfit	BB DUB PF MTB 92 WIDE

COLOR: DEEP GREEN, BLACK MAGIC BOLT

SIZES: S,M,L,XL,XXL

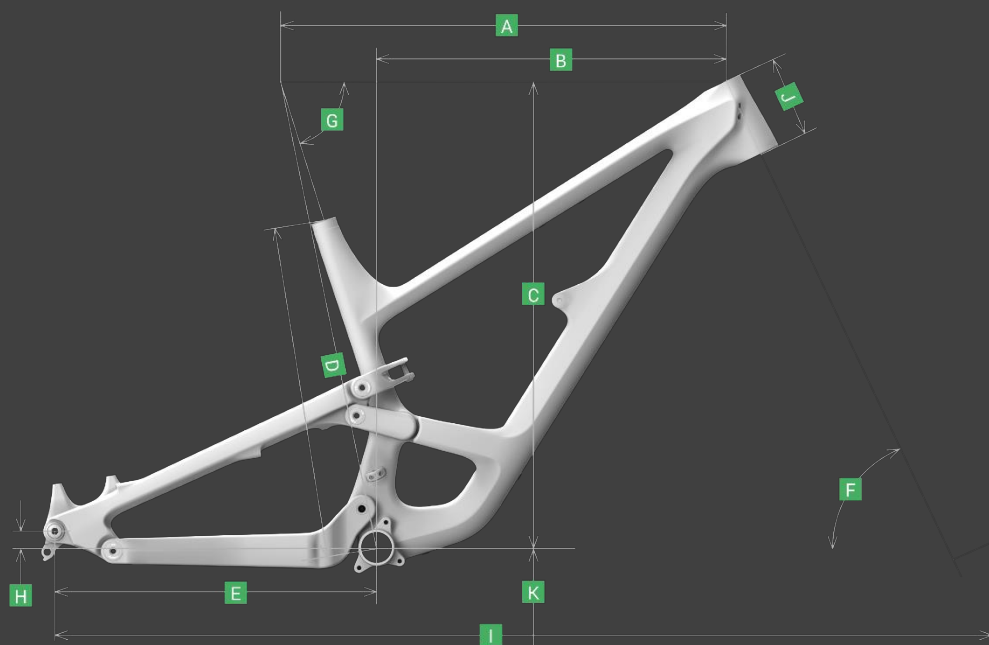

CAPRA MX CORE 4 CF

	Flipchip position	High					Low				
	Frame size	S	M	L	XL	XXL	S	M	L	XL	XXL
A	Toptube in mm	563	586	606	629	652	564	587	607	630	653
B	Reach in mm	428	448	468	488	508	424	444	464	484	504
C	Stack in mm	625	634	634	643	652	627	636	636	645	654
D	Seattube in mm	395	420	445	470	495	395	420	445	470	495
E	Chainstay in mm	432	432	432	437	437	433	433	433	438	438
F	Headtube angle	64.3°	64.3°	64.3°	64.3°	64.3°	64.0	64.0	64.0	64.0	64.0
G	Seattube angle (eff)	77.8°	77.7	77.7	77.7	77.6	77.5	77.4	77.4	77.4	77.3
H	BB drop front / rear in mm	7 / 25	7 / 25	7 / 25	7 / 25	7 / 25	12 / 30	12 / 30	12 / 30	12 / 30	12 / 30
I	Wheelbase in mm	1198	1222	1242	1271	1296	1199	1223	1243	1272	1297
J	Headtube in mm	100	110	110	120	130	100	110	110	120	130
K	BB height in mm	351	351	351	351	351	346	346	346	346	346
L	Standover height in mm	747	739	737	748	745	743	735	733	744	741